

Specifications

Construction: Vinyl, Composite Core, UV Coating + PVC Décor Film

Edge Type: Beveled

Overall Thickness: 5.5mm

Wear Layer: 0.5mm (20mil)

Length: 48"

Width: 7"

Coverage per Carton: 37.55 ft²

Pieces per Carton: 16

Weight per Carton: 47 lbs.

Installation Method: Floating

IIC=58 / STC=62

IIC=66 / STC=62 (with 1.5mm pad)

Recommended Usage: Residential & Light Commercial

Underlayment Recommended: Yes



This product is protected by a 30 year residential/5 year light commercial warranty



This floor is waterproof and won't be affected by household spills



This product is Floor Score Certified


Features

- ☑ UV Resistant
- ☑ Fire Resistant
- ☑ Scratch Resistant
- ☑ Slip Resistant
- ☑ Stain Resistant
- ☑ Fade Resistant
- ☑ Hypoallergenic
- ☑ Non Toxic
- ☑ Mildew Resistant
- ☑ Easy Maintenance

Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

Technical Data

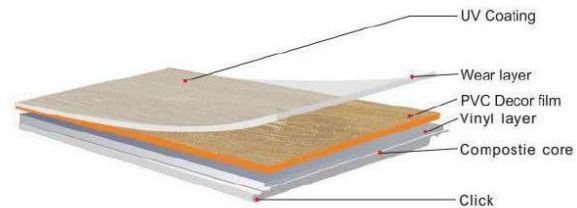

Sound, impact, reduction	EN ISO 717-2	>4,8 dB
Fire resistance	EN 13501-1	Bfl-S1
Dimension stability after exposure to heat	EN 434	< 0,10%
Colour fastness to light	ISO 105 B02	grade > 6
Static indentation		0.02mm
Flexibility	EN 435	pass
Abrasion resistance	EN 660	class T
Castor chair resistance	EN 425	pass
Slip resistance	EN 13893/DIN 51131	>= 0,3/ R10
Anti-sliding properties	class DS	μ = 0,59
Usage category	EN 685	33
Resistance to chemicals		pass
Light fastness	ISO 105-B02-3	> 6
Surface treatment		Semi-matt
CPSIA section 108-Phthalates		pass

Accessories

