

Specifications

Construction: Rigid Core LVT

Edge Type: Micro Bevel

Overall Thickness: 4mm

Wear Layer: 0.3mm (12mil)

Length: 48"

Width: 7"

Coverage per Carton: 18.91 ft²

Pieces per Carton: 8

Weight per Carton: 32 lbs.

Installation Method: Floating

Recommended Usage: Residential & Light Commercial

Underlayment Recommended: Yes



This product is protected by a 20 year residential/5 year light commercial warranty



This floor is waterproof and won't be affected by household spills

Features

These luxury vinyl floors are constructed with a high density thermo- plastic composite which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, these floors are 100% waterproof and can be wet mopped. The natural embossing allows for an authentic wood look while the rigid core resists indentations and wear from everyday household traffic.


Recommended Underlayment

- **WPCEVA** 1mm Black EVA Foam with 0.1mm black PE film
- **WPCSS** 1.5mm high density black foam with 0.1mm black PE film
- **WPCZS** 1.5mm Zero Slip foam

Technical Data

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

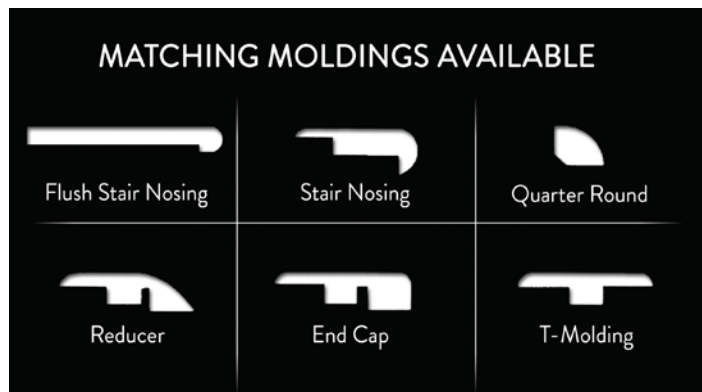

Product	Overall Thickness	4.0mm (No Pad)
Dimensions	Width and Length	180mmW x 1220mmL
Packaging (Per Carton)	8 Planks	18.91 Sq.Ft. 32 Lbs
Construction	Top Layers	High Definition Decor Film
		Enhanced Polyurethane Coating
		0.3mm Wear Layer
	Core	3.7mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material
	Density	1970kg/m ³ ±10%
	Pad	No pad
	Bevel	Micro Bevel
Installation	Floating Glueless	
Under Floor Heating	Approved - See installation manual for details.	
Warranty	20 year residential, 5 year commercial	
Test Data		
Static Load	ASTM F970	2000PSI
Heat Exposure Resistance F1700	ASTM F2199 EN16511	≤0.15%
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial
IIC & STC	ASTM E492/ ASTM E90	IIC=56 / STC=61 With 1.5mm pad: IIC=65 / STC=61
Castor Chair Resistance	ISO 4918	Pass
Fire Rating	ASTM E648/ 662	Class I
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial
F1700	EN 16511	Class 34, Heavy Commercial
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial
Chemical Composition		
VOC	FloorScore™	Pass
Ortho-phthalates	Prop 65	Not Detected / In Compliance
Lead	CPSIA	None Detected
Substances of Very High Concern (SVHC)		Not Detected