

Specifications

Construction: Vinyl, Composite Core, UV Coating + PVC Décor Film

Edge Type: Micro Beveled

Overall Thickness: 7mm

Wear Layer: 0.5mm (20mil)

Nominal Length: 60"

Nominal Width: 8-3/4"

Coverage per Carton: 21.94 ft²

Pieces per Carton: 6

Weight per Carton: 36 lbs.

Installation Method: Floating

Recommended Usage: Residential &

Light Commercial

Underlayment Required: Yes



This product is protected by a 50 year residential/10 year light commercial warranty



This floor is waterproof and won't be affected by household spills

Features

- UV Resistant
- Fade Resistant
- Fire Resistant
- Hypoallergenic
- Scratch Resistant
- Non Toxic
- Slip Resistant
- Mildew Resistant
- Stain Resistant
- Easy Maintenance


Recommended Underlayment

- VersaPro 1mm Black / Green EVA Underlayment
- VersaPro PLUS 1.5mm Black / Green Underlayment
- WPCZS 1.5mm Zero Slip High Density Black / Blue Underlayment
- RUBBER Enhanced 2mm Acoustical Silver / Green Underlayment

Certifications

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

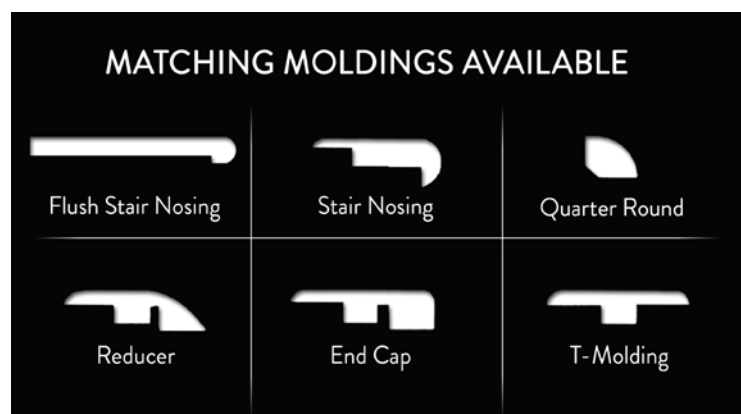

Product	Overall Thickness	7.0mm (No Pad) (2.0mm lvt+5.0wpc)
Dimensions	Width and Length	225mm W x 1510mm L
Packaging (Per Carton)	6 Planks	21.94 Sq.Ft. 36 Lbs
Construction	Top Layers	High Definition Decor Film
		Enhanced Polyurethane Coating
		0.5mm Wear Layer
	Core	5.0mm Limestone Composite: min. 45% stone, 0% wood, 100% Virgin Material
	Density	1200kg/m ³ ±10%
	Pad	No pad
	Bevel	Bevel
Installation	Floating Glueless	
Under Floor Heating	Approved - See installation manual for details.	
Warranty	50 Years Residential/10 Years Light Commercial	
Test Data		
Static Load	ASTM F970	500PSI
Heat Exposure Resistance F1700	ASTM F2199 modified(70°C) EN16511 modified (70°C)	≤0.15%
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial
IIC & STC	ASTM E492 / ASTM E90	IIC=55 / STC=61 With 1.5mm pad: IIC=64 / STC=61
Castor Chair Resistance	ISO 4918	Pass
Fire Rating	ASTM E648/ 662	Class I
Wear Resistance F1700	EN 13329 method A EN 16511	Class 34, Heavy Commercial Class 34, Heavy Commercial
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial
Chemical Composition		
VOC	FloorScore™	Pass
Ortho-phthalates	Prop 65	Not Detected / In Compliance
Lead	CPSIA	None Detected
Substances of Very High Concern (SVHC)		Not Detected