

### Specifications:

Construction: Rigid Core  
Stone Polymer Composite  
Edge Type: Painted-Bevel  
Overall Thickness: 6.5mm  
1.5mm XPE Acoustical Pad Attached  
Wear Layer: 0.5mm (20mil)  
Nominal Length: 48" x Width: 9"  
Coverage per Carton: 17.73 ft<sup>2</sup>  
Pieces per Carton: 6  
Weight per Carton: 35 lbs.  
Installation Method: Floating  
Recommended Usage: Residential &  
Light Commercial



This product is protected by a 50 year residential/10 year light commercial warranty



This floor is waterproof and won't be affected by household spills

### Features:

The Provincial XPE Collection is constructed with a high density thermo-plastic composite which is extremely stable and can be installed over most sub floors. Since there are no wood fibers, the Provincial XPE Collection is 100% Waterproof and can be wet mopped. The natural embossing allows for an authentic wood look while the rigidity of the core resists indentations and wear from everyday household traffic.


### Recommended Underlayment:

- **EssentiaLAY 2mm RUBBER Enhanced Acoustical & Vapor Underlayment**
- 6MIL Vapor Barrier

### Technical Data:

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

### Accessories:

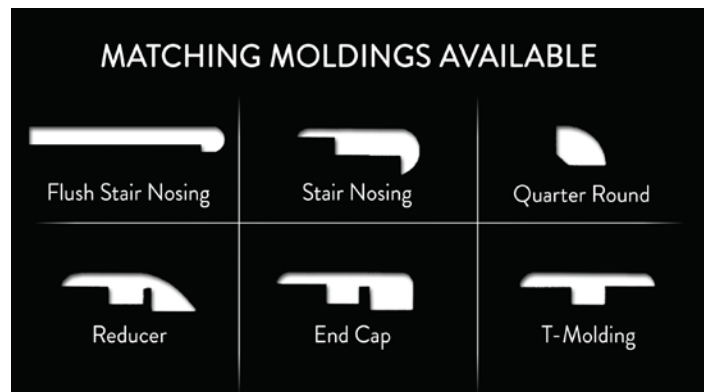

Product	Overall Thickness	6.5mm (with 1.5mm XPE Acoustical Pad Attached)		
Dimensions	Width and Length	225mmW x 1220mmL		
Packaging (Per Carton)		6 Planks	17.73 Sq.Ft.	35 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	3.7mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material		
	Density	1970kg/m <sup>3</sup> ±10%		
	Pad	1.5mm XPE Acoustical Pad Attached		
	Bevel	Painted-Bevel		
Installation	Floating - Glueless Click			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 years/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	2000PSI		
Heat Exposure Resistance F1700	ASTM F2199 EN16511	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 / ASTM E90	IIC=66 / STC=61		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance	EN 13329 method A	Class 34, Heavy Commercial		
F1700	EN 16511	Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		