

INNOVATIVE EXTRA LONG 100% WATERPROOF PERFORMANCE LAMINATE FLOORING
THE ONLY PROOF YOU NEED

VILLA COLLECTION ALLURE COLLECTION Product Specification Sheet



Plank Size:	VILLA 9"W x 60"L - ALLURE 9"W x 48"L
Thickness:	10mm (underlayment required)
Core:	Aqua Fiber Wood Based HDF
Finish:	Superior Scratch & Dent Resistance
Wear Rating:	AC4EVERPLUS
Waterproof:	100% Waterproof Performance featuring 72 Hour Spill Protection
Edge:	4-Sided Painted Micro Beveled
Gloss:	Low Sheen
Texture:	TruEMBOSSSED Wood Grain Texture
Installation:	Floating / Unilin Click System
Warranty:	Limited Lifetime Residential Limited 5-Year Light Commercial

DESCRIPTION	METHOD	RESULT	DETAILS
Class of Use	EN13329-32	Class 32	All Residential plus general commercial
Abrasion Resistance	NALFA LF-01	AC4	IP ≥ 4000 cycles
Impact Resistance	NALFA LF-01	Big Ball: ≥ 1000mm, Small Ball: ≥ 500mm	
Stain Resistance	NALFA LF-01	< 20	No more than slight effect
Sound Transmission	ASTM E90	drop ceiling: STC60 no drop ceiling: STC51	152mm slab using 3mm Ultra EVA Underlayment
Impact Insulation Class IIC	ASTM E429	drop ceiling: IIC63 no drop ceiling: IIC52	152mm slab using 3mm Ultra EVA Underlayment
Thickness Swell Test	NALFA-01	PASSED	≤ 16% (±1%) 4% Swelling after "submerged" in water for 24hr
NALFA Surface Swell Test	NALFA LF-01	< 0.5mm	Passed
Thermal Conductivity	EN14041	PASSED CLASS Cfl-S1	Suitable for Underfloor Heating System

FloorScore	Compliant
CARB 2	Compliant
TSCA Title VI	Compliant
Content	No heavy metals + lead/cadmium present
Dangerous Substances	No carcinogenic, mutagenic or reprotoxic substances present (class 1A & 1B)
Plasticizer	ORTHOPHTHALATES FREE
Coefficient of Friction	Dry Surface : 0.53



COLORS


ETPF30 Villa - Savannah	ETPF36 Villa - Hudson
ETPF31 Villa - Chesapeake	ETPF37 Villa - Beaufort
ETPF32 Villa - Camden	ETPF40 Allure - Siena
ETPF33 Villa - Calistoga	ETPF41 Allure - Nova
ETPF34 Villa - Stowe	ETPF42 Allure - Ariya
ETPF35 Villa - Kohler	ETPF43 Allure - Luna

VILLA 9"x60" - Overall Thickness: Solid 10mm (24.83 sqft/ctn) 48 ctns/pallet 1,191.84sf/pallet (8pcs/ctn)
ALLURE 9"x48" - Overall Thickness: Solid 10mm (24.8 sqft/ctn) 48 ctns/pallet 1,190.4sf/pallet (8pcs/ctn)



Scan the QR Code or visit www.eterinityflooring.com to view our extensive line of Waterproof Performance Flooring.

COORDINATING MOLDINGS AVAILABLE

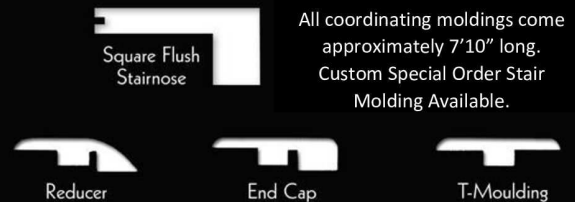

All coordinating moldings come approximately 7'10" long. Custom Special Order Stair Molding Available.

Coordinating moldings are produced to be similar and blend as much as possible to the flooring product. Since grain patterns and the natural colors of the wood / stone patterns vary, coordinating moldings cannot be an exact match to the flooring product. Coordinating moldings do not come with warranty.